


Coaxial cables for radio-frequency applications, Al/Pet and aluminum wire braid shield, low halogens emission.

1. Conductor
2. Insulation
3. Shield
4. Assembling
5. Sheath

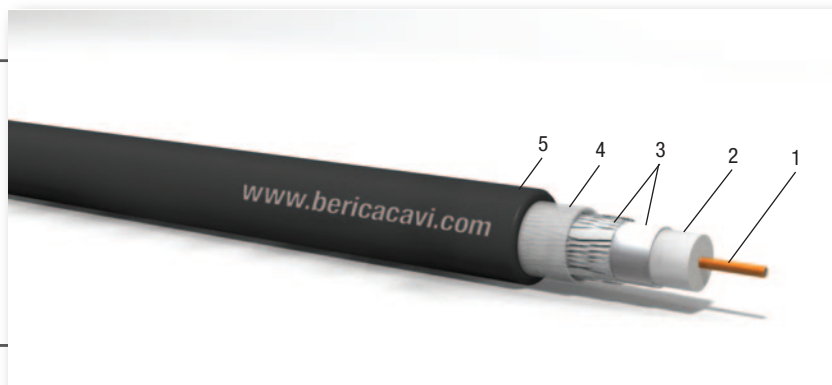

APPLICATION: Suitable for the connection of RF systems, distribution audio networks, cameras, monitors, CCTV-CATV-MATV networks.

INSTALLATION: For fixed indoors installation, without protection or inside pipes and similar closed systems.

FEATURES	DESCRIPTION	STANDARD
Conductor :	copperweld 1x1,65 mm	
Insulation :	polyethylene foam	
Shield :	Al/Pet/Al tape aluminum wire braid	
Assembling:	Pet tape	
Sheath :	PVC, TM2 quality	
Low halogens emission :	(< 22%)	CEI EN 50267-2-1 IEC 60754-1
Sheath colour :	black RAL 9005	
Testing voltage :	5 kVac	
Max working temperature :	70 °C	
Min. installation temperature :	0 °C	
Bending radius :	Ø x 14	

ATTENUATION								
MHz	50	100	200	400	800	1000	1350	1750
dB/100 m	4,0	4,7	6,5	9,6	15,0	16,6	18,4	20,7

TYPE	MEDIUM Ø OUTER mm	MEDIUM WEIGHT kg/km	PRODUCT CODE
RG 11	10,25	80,5	B40RG11